

# JAY KAY SEAMLESS GUTTER SUPPLY

744 Ringwood Avenue, Wanaque, NJ 07465 • Phone (973) 616-1669 • Fax (973) 616-5279 Or Just Dial 201-GUTTERS

## The Gutter Shingle Installation Instructions

The Gutter Shingle installation may vary depending on how the gutters are installed.

### TOOLS THAT MAY BE REQUIRED

- Tin snips or hacksaw to miter cut corners and cut pieces to length.
- Pliers may also be needed to bend the lip of the gutter around the gutter spikes.
- Power screw driver (some installations may require fastening to lip of gutter).

### INSTALLATION STEPS

1. First, do a good job cleaning the gutters and downspouts. To assure the downspouts are clear of debris, run a hose in the gutters and check the water flow at the bottom of all downspouts. The water should flow out without any backup in the gutter.

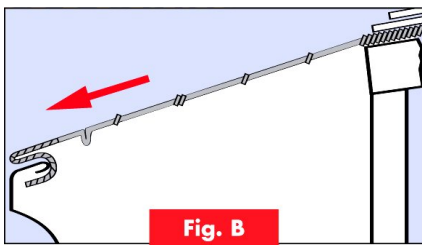


Fig. B

**Note:** If there is not enough space between the gutter lip and spike, you will need to bend the lip up a little or pinch the lip closed to allow the clip to fit over the lip. (Fig. C)

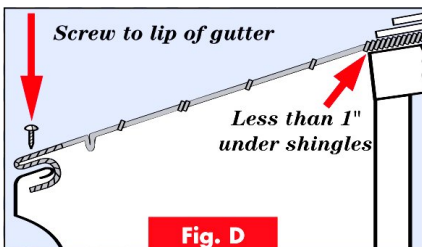


Fig. D

2. Starting at one end of the gutter, slightly lift the first row of shingles and slide the back edge of the gutter cover under the shingles (Fig. A), then pull the front edge of The Gutter Shingle forward so that it clips to the front edge of the gutter. (Fig. B)



Fig. A

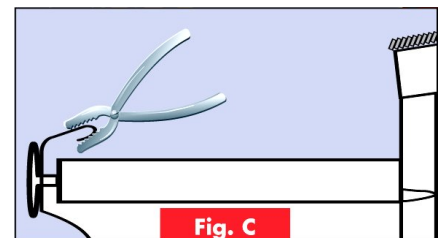


Fig. C

3. If the roof shingles do not cover the back edge of gutter cover by at least one inch, it will be necessary to screw The Gutter Shingle to the front of the gutter using a sheet metal screw. (Fig. D)
4. Install the next section using the same process as step 2. The notched clip will allow each section to overlap creating a seamless run of The Gutter Shingle.

5. To fit inside or outside corners, miter cut opposite ends of the two adjoining pieces to form a corner point.

**Note:** To get an accurate cut, you should mark the cut with The Gutter Shingle in place on the gutter and roof. This will give the proper angle to miter cut each section.

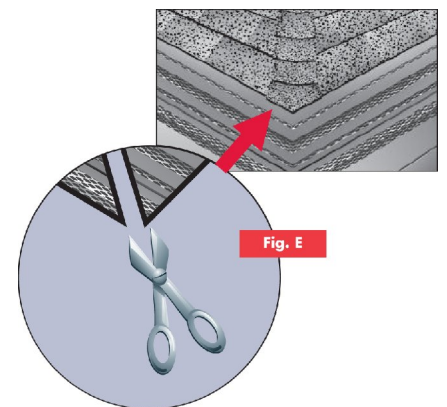


Fig. E